



VKP60


60mm Ultra-Compact Receipt/Ticket Kiosk Printer


VKP60 is the kiosk printer for **receipt and ticket** printing. Thanks to its **multiple configurations**, it is suitable for a wide variety of self-service applications. Compact, versatile, and provided with useful features such as **anti-jamming**, **full and partial cutting**, this device can be employed in any type of kiosk thanks to its adjustable two-position roll holder. VKP60 is available in three different configurations: **compact**, **bezel** and **presenter**.

Jumbo roll holder

The jumbo roll holder for VKP60 is designed to **extend the autonomy** of kiosk installations by supporting extra-long paper rolls. Ideal for high volume applications, it reduces the frequency of paper roll replacement. With flexible mounting options and full compatibility with VKP60, VKP60 bezel and VKP60 presenter, it provides a **reliable and adaptable** solution for demanding self-service applications.

- **Support large paper rolls:** up to 200mm outer diameter, increasing kiosk uptime and reducing maintenance frequency.
- **Integrated pre-tensioner system:** designed to absorb shocks and ensure smooth paper unwinding.
- **Compatible with multiple core sizes:** supporting inner cores from 25mm to 40mm.
- **Flexible installation options:** with horizontal or vertical mounting underneath the kiosk.
- **Full VKP60 compatibility:** including VKP60, VKP60 bezel and VKP60 presenter, with hanging brackets and wired NPE included.

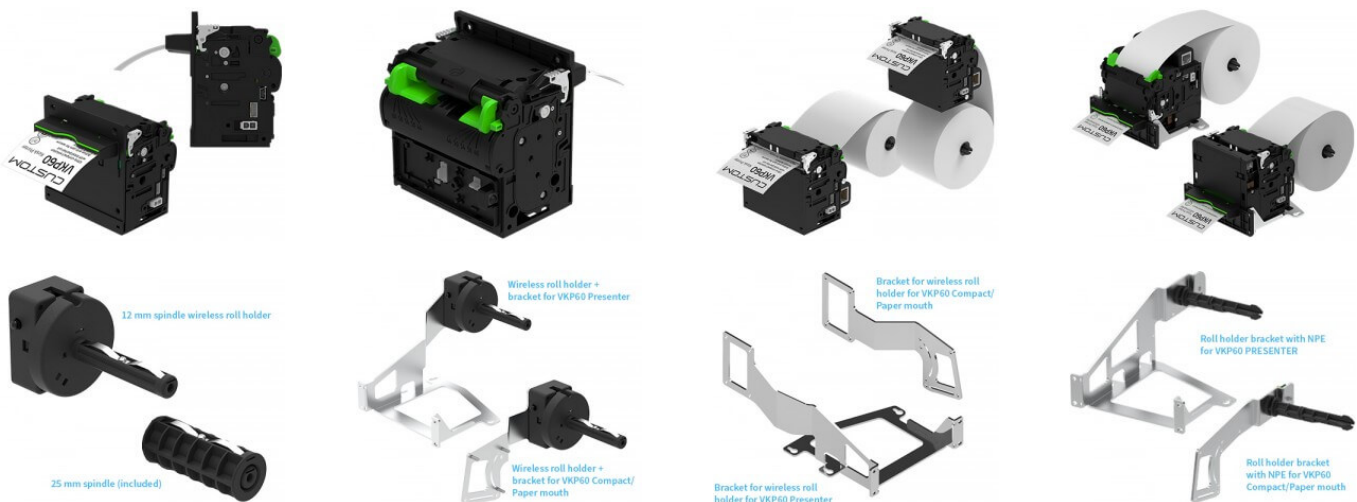




ACCESSORIES

- Roll holder bracket VKP60 with NPE
 - Roll holder bracket wireless VKP60
 - Roll holder bracket wireless VKP60 Presenter
 - Roll holder bracket VKP60 Presenter with NPE
 - Wireless roll holder VKP60
 - Jumbo roll holder VKP60
 - VKP60 adapter to 12Vdc
 - VKP60 compatible TG2460 fixing kit
 - Dongle ETH VKP60
 - Dongle RS232 VKP60
 - Power supply 24V 60W connector DIN
-

TECHNICAL SHEET

	VKP60	VKP60 - Bezel	VKP60 - Presenter
Resolution	203 dpi		
Power supply	24V, 12V adapter (optional)		
Printing speed	up to 200 mm/s @24V		
Paper thickness	50 - 130 μ m	50 - 100 μ m	
Roll diameter	max. 100 mm (with CUSTOM roll holder)		
Paper width	44, 50, 54, 58, 60 mm		
Cutter	Total and partial cut		Total cut
Interfaces	USB 2.0, Virtual Com, RS232 or ETH (optional)		
Sensors	Paper present, cover open, printhead temperature, cutter home, black mark, anti-jam, optional: near paper end		Paper present, cover open, printhead temperature, cutter home, black mark, paper in output, optional: near paper end
Character set	PC437, PC850, PC858, PC860, PC862, PC863, PC864, PC865, PC866, Katakana, WPC1250, WPC1251, WPC1252, WPC1253, WPC1254, WPC1255, WPC1256, WPC1257, WPC1258, Chinese GB18030, Korean PC949		
Supported barcodes	UPC-A - UPC-E - EAN13 - EAN8 - CODE39 - ITF - CODABAR - CODE93 - CODE128 - CODE32 Codice QR - Aztec - PDF417 - Datamatrix - GS1 Databar		
Print head life	200 km / 100M pulses		
Cutter life	1M		
LED paper mouth	No	Default	
Drivers	Windows® (32/64 bit), CUPS Linux (32/64 bit), OPOS, Java POS, Status Monitor SDK		
SW tools	PrinterSet, CPT, Windows® API, Driver Manager, Android™ API, iOS API		
Operative temperature	-20 to +70°C ; 10 to 90% RH (no condensation)		
Dimensions	86 mm (W) x 58 mm (D) x 81 mm (H)	86 mm (W) x 78.5 mm (D) x 89.5 mm (H)	109.8 mm (W) x 99 mm (D) x 87.3 mm (H)
Weight	330 g	340 g	453 g

MODELS



915NA010100300
PRINTER VKP60 USB RS232
COMPACT



915NA020100300
PRINTER VKP60 USB RS232
PAPER MOUTH



915NA030100300
PRINTER VKP60 USB RS232
PRESENTER

CUSTOM®

976NA010000005

Via I. Newton, 4 - 43010 Fontevivo PR - VAT: IT02498250345 - TEL: +39 0521 680111 - FAX: - UNIQUE CODE: 8RQN7AZ

The technical data on this website are not binding and may be changed without advanced notice.

Last update: 14 July 2026